



Customer \_\_\_\_\_

Drawing \_\_\_\_\_

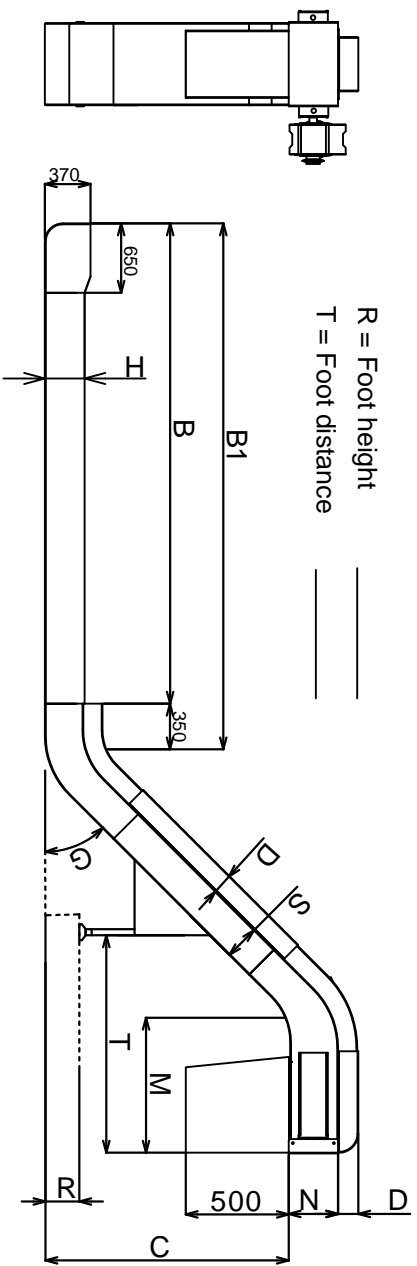

R = Foot height \_\_\_\_\_  
T = Foot distance \_\_\_\_\_

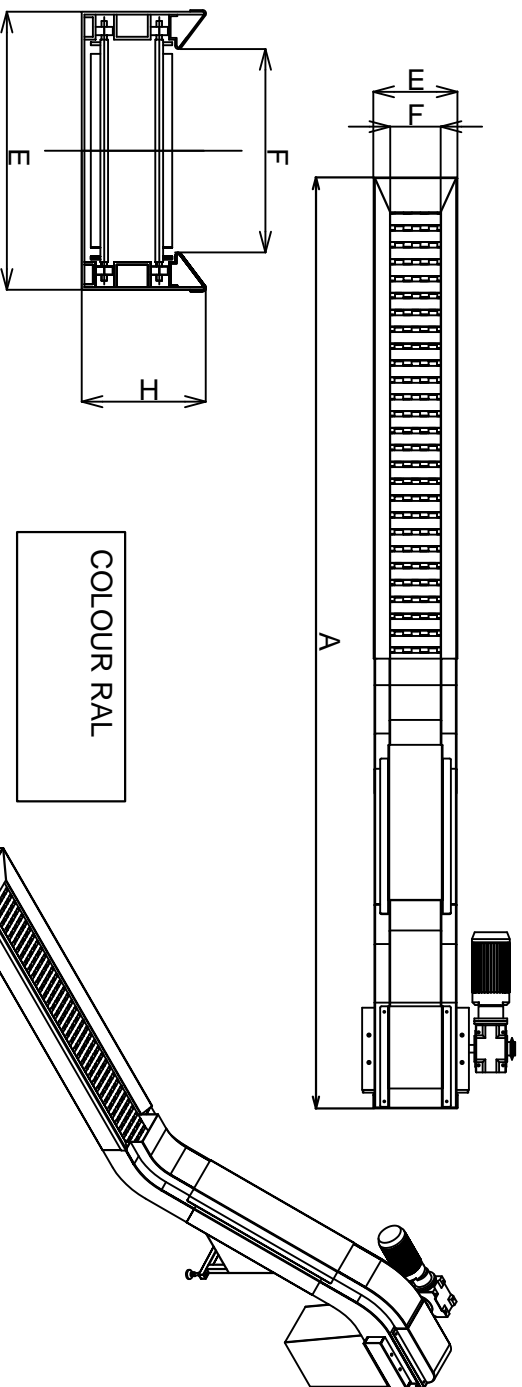

COLOUR RAL \_\_\_\_\_

Sheet Iron S355-MC \_\_\_\_\_

Amount of coolant L/v' \_\_\_\_\_  
Quantity of chips to be removed dm/1' \_\_\_\_\_  
Type chip \_\_\_\_\_  
Material to be removed \_\_\_\_\_

Speed, carpet band m/min \_\_\_\_\_ 5.2 ; 6.6  
Porters pitch \_\_\_\_\_ 400 ; 700

**CONSTRUCTIONS STANDARD P100**

	H	S	N	Porters Height	Chain Pitch
<input type="checkbox"/>	350	300	360	60	100

A = Total length \_\_\_\_\_  
B1 = Conventional length \_\_\_\_\_

B = Usable length \_\_\_\_\_ B1 - 350

C = Unloading height \_\_\_\_\_ MIN. 700

E = Casing width \_\_\_\_\_ MIN. 350 ; INCR. +50

F = Usable height \_\_\_\_\_ E - 170

H = Casing height \_\_\_\_\_ 350

M = Head projection \_\_\_\_\_ 1000

G = Inclination angle \_\_\_\_\_ 45° ; 50° ; 60°

D = Carter height \_\_\_\_\_ 350

Gear motor on left side (like the figure)

Gear motor on right side (opposite the figure)

Motor power KW \_\_\_\_\_

Voltage V \_\_\_\_\_ Hz \_\_\_\_\_

Carpet type  Drag chain

Not punched carpet  Punch carpet

Anti-rust treatment \_\_\_\_\_

Painting \_\_\_\_\_

Gear motor with torque limiter \_\_\_\_\_

Overload shaft sensor \_\_\_\_\_

Oscillating micro-switch \_\_\_\_\_

Control panel with reversing switch only \_\_\_\_\_

Control panel with magnetic contactors, thermal switch and push-button strip \_\_\_\_\_

Without electrical equipment \_\_\_\_\_