
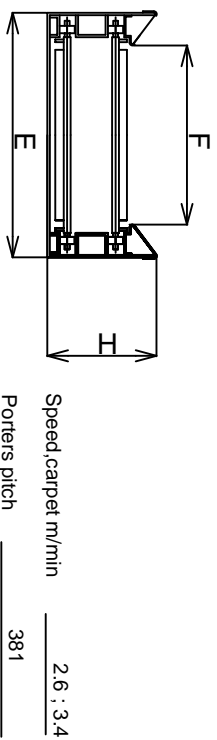
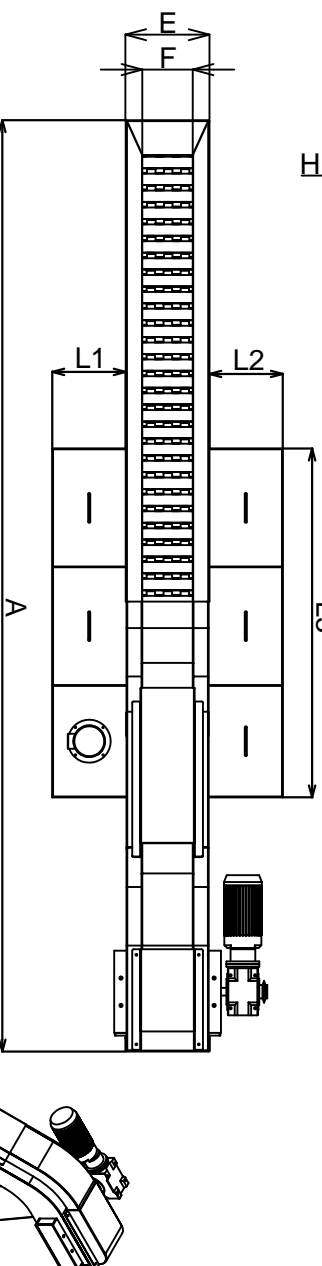


Customer \_\_\_\_\_


Drawing \_\_\_\_\_

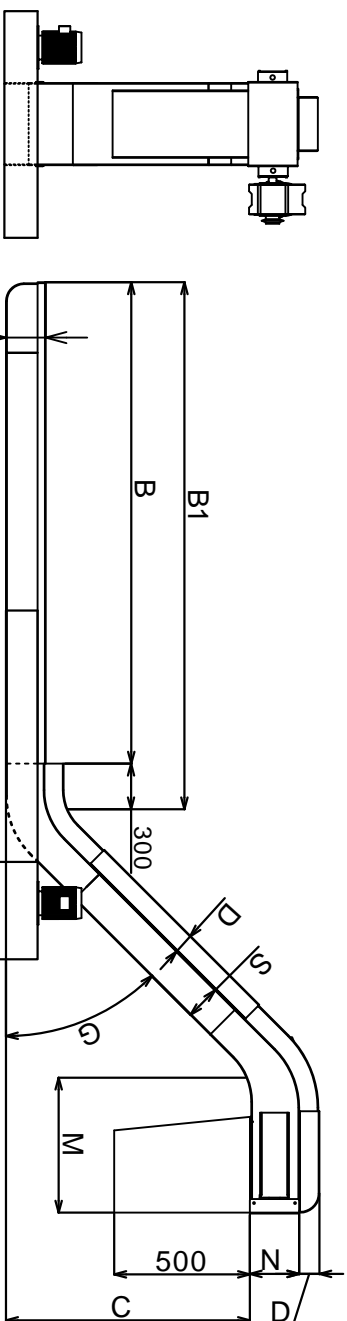

Sheet Iron S355-MC

Amount of coolant lV/1' \_\_\_\_\_  
 Quantity of chips to be removed dm<sup>3</sup>/1' \_\_\_\_\_  
 Type chip \_\_\_\_\_  
 Material to be removed \_\_\_\_\_

COLOUR RAL

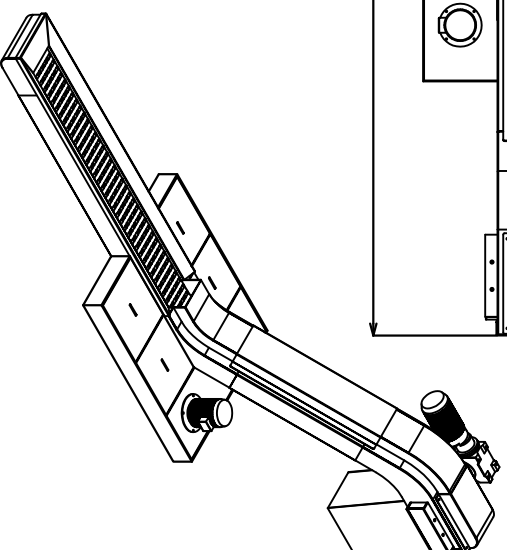

CONSTRUCTIONS STANDARD P50		Porters height	Chain pitch
H	S	N	
<input type="checkbox"/> 220	<input type="checkbox"/> 180	<input type="checkbox"/> 210	<input type="checkbox"/> 30
<input type="checkbox"/> 240	<input type="checkbox"/> 200	<input type="checkbox"/> 230	<input type="checkbox"/> 50

- A = Total length \_\_\_\_\_
- B1 = Conventional length \_\_\_\_\_
- B = Usable length \_\_\_\_\_ B1 - 300
- C = Unloading height \_\_\_\_\_ MIN. 550
- E = Casing width \_\_\_\_\_ MIN. 265; INCR. +50
- F = Usable height \_\_\_\_\_ E - 130
- H = Casing height \_\_\_\_\_ 220 ; 240
- M = Head projection \_\_\_\_\_ 650
- G = Inclination angle \_\_\_\_\_ 45° ; 50° ; 60°
- D = Carter height \_\_\_\_\_ 100 ; 250
- Motor power KW \_\_\_\_\_
- Voltage V \_\_\_\_\_ Hz \_\_\_\_\_
- Carpet type  Drag chain
- Not punched carpet  Punch carpet
- Coolant tank  yes  no
- L1 = \_\_\_\_\_ L2 = \_\_\_\_\_ L3 = \_\_\_\_\_ L4 = \_\_\_\_\_
- Pump  yes  no \_\_\_\_\_
- lV/1' \_\_\_\_\_ Bar \_\_\_\_\_ KW \_\_\_\_\_
- Anti-rust treatment
- Painting \_\_\_\_\_
- Gear motor with torque limiter
- Overload shaft sensor
- Oscillating micro-switch
- Control panel with reversing switch only
- Control panel with magnetic contactors, thermal switch and push-button strip
- Without electrical equipment