
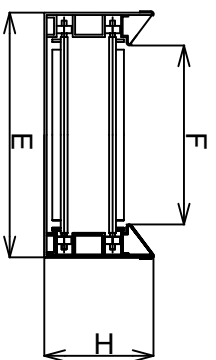


Customer \_\_\_\_\_

Drawing \_\_\_\_\_

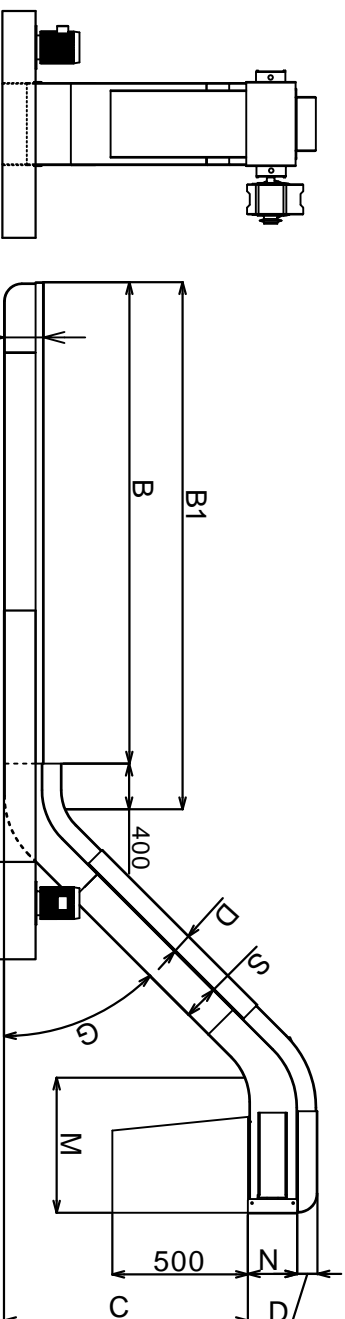


Speed carpet m/min \_\_\_\_\_ 3.9 ; 5.2  
Porters pitch \_\_\_\_\_ 450 ; 750

Sheet Iron S355-MC

Amount of coolant l/v/1' \_\_\_\_\_  
Quantity of chips to be removed dm/1' \_\_\_\_\_  
Type chip \_\_\_\_\_  
Material to be removed \_\_\_\_\_

COLOUR RAL

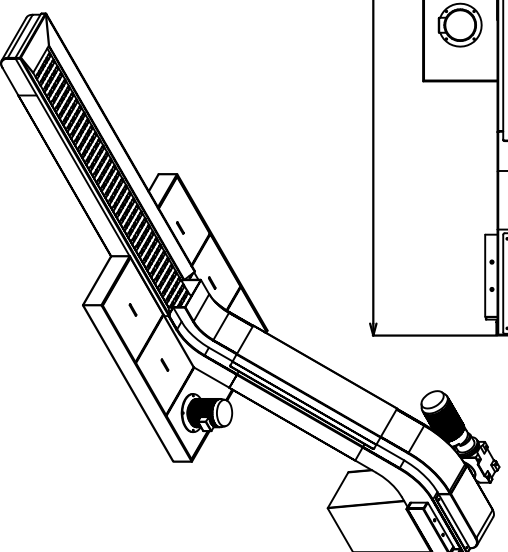

CONSTRUCTIONS STANDARD P75

<input type="checkbox"/> H	<input type="checkbox"/> S	<input type="checkbox"/> N	Porters height	Chain pitch
<input type="checkbox"/> 300	<input type="checkbox"/> 260	<input type="checkbox"/> 286	60	75

A = Total length \_\_\_\_\_

B1 = Conventional length \_\_\_\_\_

B = Usable length \_\_\_\_\_ B1 - 400

C = Unloading height \_\_\_\_\_ MIN. 700

E = Casing width \_\_\_\_\_ MIN. 350 ; INCR. +50

F = Usable height \_\_\_\_\_ E - 170

H = Casing height \_\_\_\_\_ 300

M = Head projection \_\_\_\_\_ 900

G = Inclination angle \_\_\_\_\_ 45° ; 50° ; 60°

D = Carter height \_\_\_\_\_ 300

Gear motor on right (like the figure)

Gear motor on right side(opposite the figure)

Motor power KW \_\_\_\_\_

Voltage V \_\_\_\_\_ Hz \_\_\_\_\_

Carpet type  Drag chain

Not punched carpet  Punch carpet

Coolant tank  yes  no

L1= \_\_\_\_\_ L2= \_\_\_\_\_ L3= \_\_\_\_\_ L4= \_\_\_\_\_

Pump  yes  no

l/v/1' \_\_\_\_\_ Bar \_\_\_\_\_ KW \_\_\_\_\_

Anti-rust treatment

Painting \_\_\_\_\_

Gear motor with torque limiter

Overload shaft sensor

Oscillating micro-switch

Control panel with reversing switch only

Control panel with magnetic contactors, thermal switch and push-button strip

Without electrical equipment