



Customer \_\_\_\_\_

Drawing \_\_\_\_\_

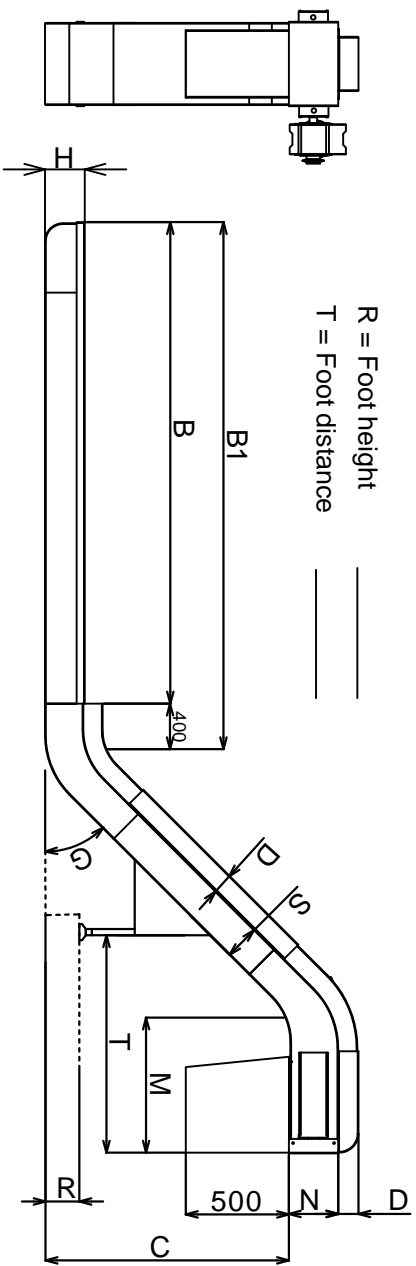

R = Foot height \_\_\_\_\_  
T = Foot distance \_\_\_\_\_

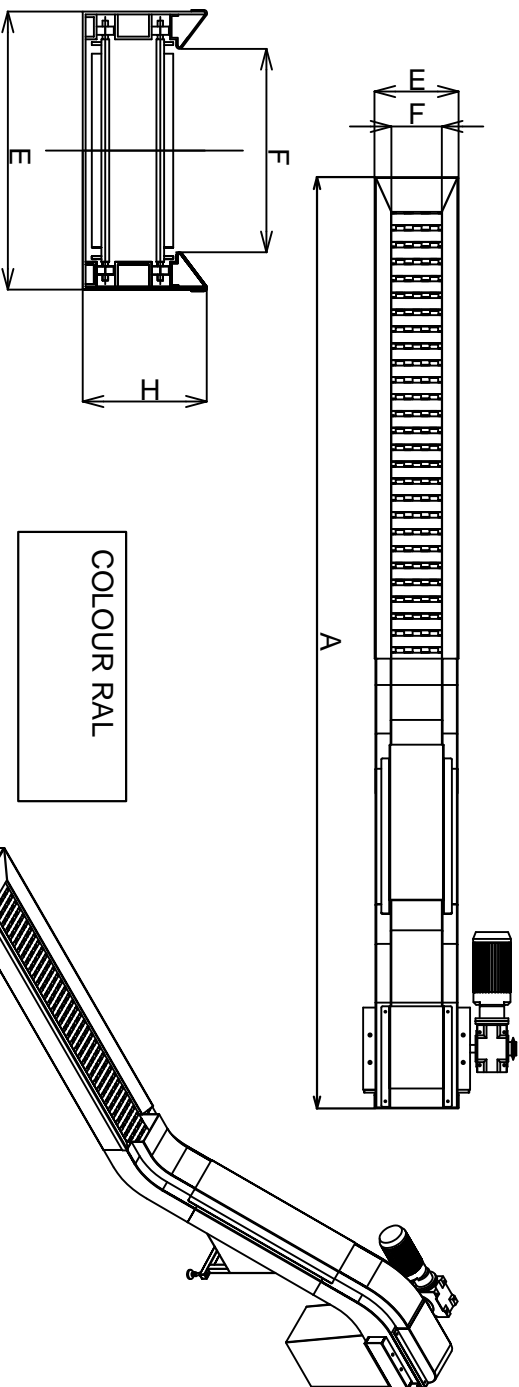

COLOUR RAL \_\_\_\_\_

Sheet Iron S355-MC \_\_\_\_\_

Amount of coolant L/v' \_\_\_\_\_  
Quantity of chips to be removed dm<sup>3</sup>/v' \_\_\_\_\_  
Type chip \_\_\_\_\_  
Material to be removed \_\_\_\_\_

Speed, carpet band m/min \_\_\_\_\_ 3.9 ; 5.2  
Porters pitch \_\_\_\_\_ 450 ; 750

**CONSTRUCTIONS STANDARD P75**

	H	S	N	Porters Height	Chain Pitch
<input type="checkbox"/>	300	260	286	60	75

A = Total length \_\_\_\_\_

B1 = Conventional length \_\_\_\_\_

B = Usable length \_\_\_\_\_ B1 - 400

C = Unloading height \_\_\_\_\_ MIN. 700

E = Casing width \_\_\_\_\_ MIN. 350 ; INCR. +50

F = Usable height \_\_\_\_\_ E - 170

H = Casing height \_\_\_\_\_ 300

M = Head projection \_\_\_\_\_ 900

G = Inclination angle \_\_\_\_\_ 45° ; 50° ; 60°

D = Carter height \_\_\_\_\_ 300

Gear motor on left side (like the figure)

Gear motor on right side (opposite the figure)

Motor power KW \_\_\_\_\_

Voltage V \_\_\_\_\_ Hz \_\_\_\_\_

Carpet type  Drag chain

Not punched carpet  Punched carpet

Anti-rust treatment \_\_\_\_\_

Painting \_\_\_\_\_

Gear motor with torque limiter \_\_\_\_\_

Overload shaft sensor \_\_\_\_\_

Oscillating micro-switch \_\_\_\_\_

Control panel with reversing switch only \_\_\_\_\_

Control panel with magnetic contactors, thermal switch and push-button strip \_\_\_\_\_

Without electrical equipment \_\_\_\_\_